


# EH30 SERIES 1/4" PIPE SIZE

13




## Features:

The EH30 is a 2-way, unidirectional reduced port solenoid valve that is great for a wide range of fluids and gases. This direct acting valve offers a solution to a variety of applications to control the flow of high pressure air, water, natural gas, hydrogen, nitrogen and other gases or light liquids compatible with materials of construction. Suitable for cryogenic applications, this low flow, high pressure valve packages great versatility in a compact design for pressures of zero to 10,000 PSIG. No minimum pressure is required for opening, and it will not “burp” due to any rapid spikes in inlet pressure. Both the Normally Closed and Normally Open versions can be universally mounted, as a standard. They both may be mounted in any orientation. **Filters recommended for all applications.**

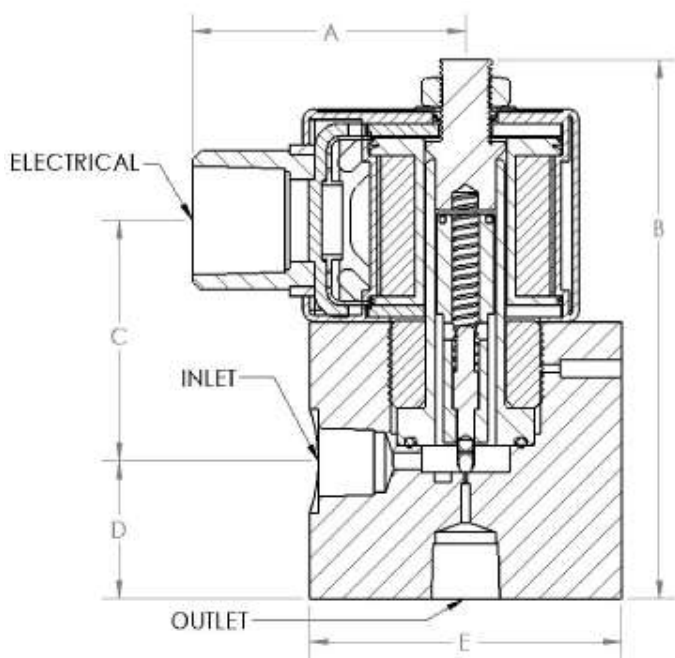

Normally Closed

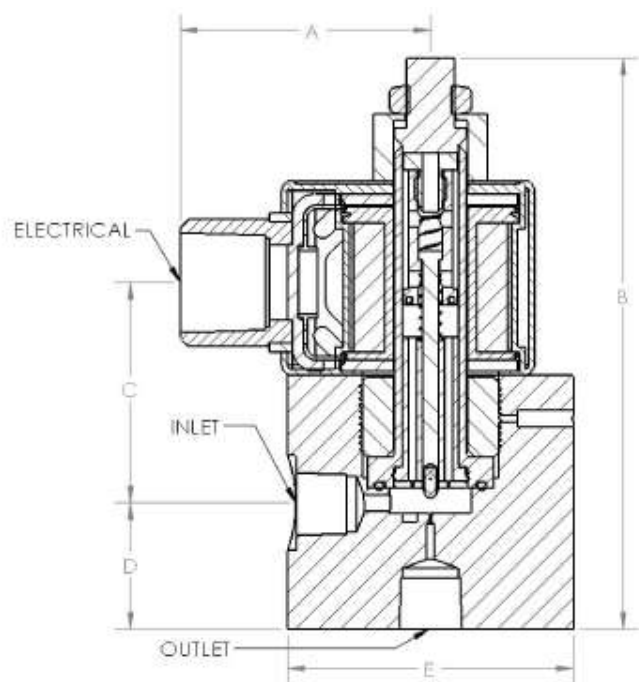

Normally Open

				Reference Dimensions (inches)				
	Inlet/Outlet	Electrical	Ship Weight (lbs.)	A	B	C	D	E
EH30-04 Normally Closed	1/4" NPT	1/2" NPT Conduit	2.90	2.0	3.9	1.7	1.0	ø 2.20
EH30-04 Normally Open			3.15	2.0	4.5	1.7	1.0	ø 2.20

# EH30 SERIES












## 1/4" PIPE SIZE

14



### How To Order

Base Model Number		Connection & Orifice Size		AC/DC Voltage and Hertz		Suffix Option Field (s)																																		
EH30	—		—		—																																			
		<table><tr><td>041</td><td>¼", 0.019"</td></tr><tr><td>042</td><td>¼", 0.032"</td></tr></table>	041	¼", 0.019"	042	¼", 0.032"		<table><tr><td>A024</td><td>24 / 60</td></tr><tr><td>A120</td><td>120 / 60</td></tr><tr><td>A240</td><td>240 / 60</td></tr><tr><td>D012</td><td>12 DC</td></tr><tr><td>D024</td><td>24 DC</td></tr><tr><td>D120</td><td>120 DC</td></tr></table>	A024	24 / 60	A120	120 / 60	A240	240 / 60	D012	12 DC	D024	24 DC	D120	120 DC		<table><tr><td>DN</td><td>Din Connector (Not Explosion Proof)</td></tr><tr><td>GS</td><td>General Service (Not Explosion Proof)</td></tr><tr><td>HY</td><td>Class 5 Leakage Test with Helium</td></tr><tr><td>NO</td><td>Normally Open</td></tr><tr><td>OX</td><td>Oxygen Clean</td></tr><tr><td>CY</td><td>Cryogenic Service</td></tr><tr><td>TC</td><td>Tube Connector</td></tr><tr><td>T5</td><td>Class 5 Leakage Test with Air</td></tr><tr><td>S2</td><td>SAE J1926 Size "2" Connection</td></tr></table>	DN	Din Connector (Not Explosion Proof)	GS	General Service (Not Explosion Proof)	HY	Class 5 Leakage Test with Helium	NO	Normally Open	OX	Oxygen Clean	CY	Cryogenic Service	TC	Tube Connector	T5	Class 5 Leakage Test with Air	S2	SAE J1926 Size "2" Connection
041	¼", 0.019"																																							
042	¼", 0.032"																																							
A024	24 / 60																																							
A120	120 / 60																																							
A240	240 / 60																																							
D012	12 DC																																							
D024	24 DC																																							
D120	120 DC																																							
DN	Din Connector (Not Explosion Proof)																																							
GS	General Service (Not Explosion Proof)																																							
HY	Class 5 Leakage Test with Helium																																							
NO	Normally Open																																							
OX	Oxygen Clean																																							
CY	Cryogenic Service																																							
TC	Tube Connector																																							
T5	Class 5 Leakage Test with Air																																							
S2	SAE J1926 Size "2" Connection																																							

### Possible EH30 Options & Add-Ons

						
72" Lead Length	Din Connector	Screw Terminal	1/4 Tab (spade)	General Service	Hydrogen Service	Normally Open
						
Oxygen Service	Tube Connector	Class V Leakage Testing	NEMA 4X	Stainless Steel Tags	SAE Port	

The following are standard on the EH30:

		
Explosion Proof	Stainless Steel Valve Body	Universal Mount

### Certifications



CRN - Canadian Registration Number

### Construction

Valve Body:	316 SS
O Ring (Standard):	PTFE (cryo to 400°F)
Cartridge:	316 SS & 430 SS
Pilot / Seal:	303 SS / PTFE (cryo to 400°F)
Spring:	302 SS
Plunger:	430 SS
Bonnet Retainer:	430 SS
Fluid Temperature:	-423°F to +400°F

\* See Temp Limits for UL Listed Coils

### Pressure

Maximum pressures shown are measured in PSIG

	Orifice Size	
	0.019"	0.032"
Normally Closed AC Voltage:	10,000	10,000
Normally Closed DC Voltage:	10,000	6,300
Normally Open AC Voltage:	7,500	2,800
Normally Open DC Voltage:	4,300	1,800

### Flow

Orifice Size	0.019"	0.032"
C <sub>v</sub>	0.005	0.020

Standard Sealing Is Class 2, Per ANSI/FCI 92-2-2001

### Electrical (Coil)

	AC Power			DC Power		
Wattage	10			22		
Voltage	24	120	240	12	24	120
Inrush (RMS amps)	2.6	0.6	0.3	N/A		
Holding (RMS amps)	1.2	0.3	0.17	1.8	0.9	0.2
Insulation	Class F			Class H		
Connection	1/2" NPT, 18" Leads					
Standard Coil ***	NEMA 3, 3S, 4, 4X, 7, 9					
General Service Coil	NEMA 1, 2, 3, 3S, 4, 4X					

\*\*\* All for use in:

Class I Div 1 & 2, Groups A, B, C, D;  
Class II Div 1 & 2, Groups E, F, G

10 Watt Solenoid Coils:

- Temperature Code T4: Ambient Temperature range of -20 C to 65.6 C and maximum fluid temperature of 121.1 C

22 Watt Solenoid Coils:

- Temperature Code T3C: Ambient Temperature range of -20 C to 50 C and maximum fluid temperature of 65.0 C

### Possible Media



General Gases  
and Liquids



Fuels &  
Light Oils



Flammable  
Gases



Hydrogen



Oxygen



Corrosives



Sea & Salt  
Water



Viscous  
Liquids



Steam



Cryogenics